



# Pleasant Run - FIBI017




## SUMMARY OF RESULTS – FIBI017



1. Stream Name:	Pleasant Run
2. Sampling Date:	6/22/2005
3. Sampling Location:	Locust Rd.
4. Municipality:	Readington Twp.
5. County:	Hunterdon
6. Watershed Management Area:	8
7. Contributing Drainage Area (Sq. Mi.):	4.8
8. Electrofishing Gear:	2 Backpacks
9. FIBI Score and Rating:	Round 1 Fair (36); Round 2 Good (42)
10. Habitat Score and Rating:	Round 1 Sub Optimal (144); Round 2 Sub-Optimal (127)
11. Fishable Species Present:	Yes
12. Relevant AMNET <sup>1</sup> Station Data:	
Proximity of FIBI station to AMNET station:	0.9mi downstream AN0339
AMNET Rating:	1994 – Moderate; 1999 - Non-impaired; 2004 – Non-Impaired
13. Stream Chemistries:	
Dissolved Oxygen (mg/l)	7.48
Temperature °C.	20.75
pH	7.38
Conductivity (µmhos/cm)	257
14. Length of Stream Sampled:	150m
15. Water Clarity:	Clear
16. Average Open Forest Canopy:	24.7%
17. Discharge:	1.2 cfs
18. Substrate:	40% Gravel/Sand, 20% Cobble, 10% Mud, 20% Silt, 10% Bedrock
19. Habitat:	20% Riffle, 40% Run, 40% Pool
20. Snags:	Yes
21. Periphyton:	Moderate
22. Submerged Aquatic Vegetation	No
23. Outfalls:	None
24. Number of Fish Species Identified:	13
25. Total Number of Fish Collected:	1317
26. Number of Fish With Anomalies:	17
27. Other Observations:	

<sup>1</sup> AMNET is the acronym for the DEP's ambient benthic macroinvertebrate monitoring network – a series of 820 monitoring stations located throughout the state's waterways that collects data on the health of bottom dwelling stream fauna which in turn is used to assess general water quality.

**FIBI017  
PLEASANT RUN  
LOCUST ROAD  
READINGTON TWP., HUNTERDON COUNTY**

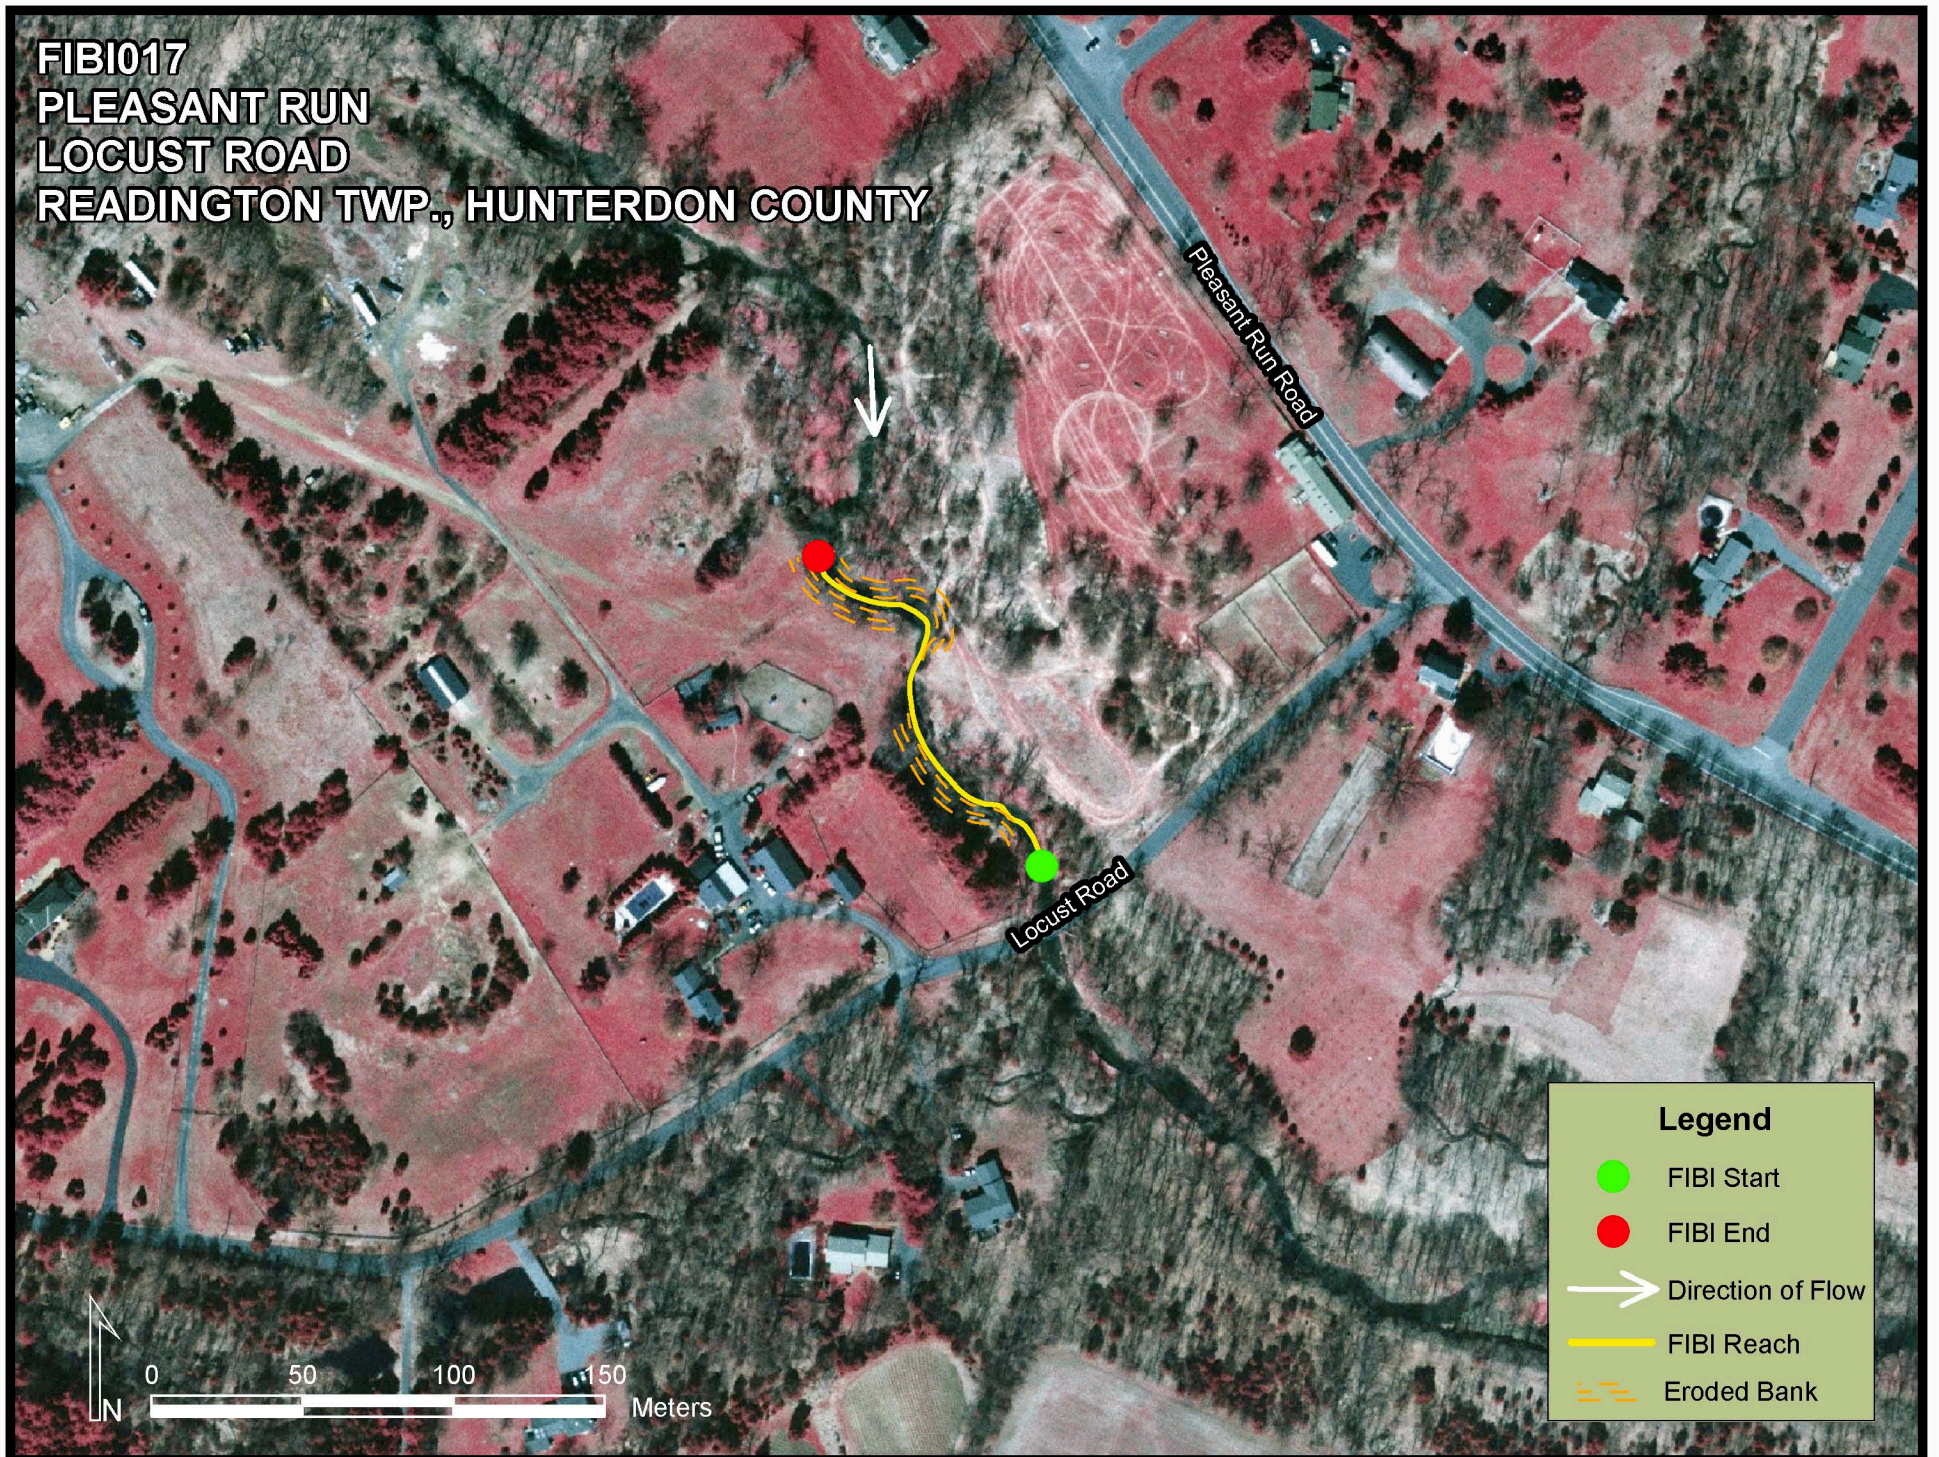

**FIBI017-Pleasant Run @ Locust Rd**  
**Date Sampled - 6/22/2005**

Excellent **Good** Fair Poor

	Score
# of Fish Species	5
# of Benthic Insectivorous Species (BI) (excluding White Suckers and Bullheads)	5
# of Trout and Centrarchid Species (excluding Green Sunfish and Bluegill)	3
# of Intolerant Species (IS)	3
Proportion of Tolerant Individuals	5
Proportion of Individuals as Generalists	5
Proportion of Individuals as Insectivorous Cyprinids	5
Proportion of Individuals as Trout OR Proportion of Individuals as Piscivores (excluding American Eel)*	*whichever gives better score 1
# of Individuals in Sample (excluding Tolerant Species)	5
Proportion of Individuals w/disease/anomalies (excluding blackspot)	5
Total	42

<b>Stream Rating</b>	
<b>45-50</b>	<b>Excellent</b>
<b>37-44</b>	<b>Good</b>
<b>29-36</b>	<b>Fair</b>
<b>10-28</b>	<b>Poor</b>

# HABITAT ASSESSMENT FOR *HIGH GRADIENT STREAMS*

Pleasant Run (FIBI017) – 6/22/05

	Condition Category																				
	Optimal					Suboptimal					Marginal					Poor					
1. Epifaunal Substrate /Available Cover	Greater than 70% of substrate favorable for epifaunal colonization and fish cover; mix of snags, submerged logs, undercut banks, cobble or other stable habitat and at stage to allow full colonization potential (i.e., logs/snags that are <u>not</u> new fall and <u>not</u> transient).					40-70% mix of stable habitat; well-suited for full colonization potential; adequate habitat for maintenance of populations; presence of additional substrate in the form of newfall, but not yet prepared for colonization (may rate at high end of scale).					20-40% mix of stable habitat; habitat availability less than desirable; substrate frequently disturbed or removed.					Less than 20% stable habitat; lack of habitat is obvious; substrate unstable or lacking.					
SCORE 17	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
2. Embeddedness	Gravel, cobble, and boulder particles are 0-25% surrounded by fine sediment. Layering of cobble provides diversity of niche space					Gravel, cobble, and boulder particles are 25-50% surrounded by fine sediment.					Gravel, cobble, and boulder particles are 50-75% surrounded by fine sediment.					Gravel, cobble, and boulder particles are more than 75% surrounded by fine sediment.					
SCORE 8	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
3. Velocity/Depth Regimes	All 4 velocity/depth regimes present (slow-deep, slow-shallow, fast-deep, fast-shallow). (slow is <0.3 m/s, deep is >0.5 m)					Only 3 of the 4 regimes present (if fast-shallow is missing, score lower than if missing other regimes).					Only 2 of the 4 habitat regimes present (if fast-shallow or slow-shallow are missing, score low).					Dominated by 1 velocity / depth regime (usually slow-deep).					
SCORE 15	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
4. Sediment Deposition	Little or no enlargement of islands or point bars and less than 5% (<20% for low-gradient streams) of the bottom affected by sediment deposition.					Some new increase in bar formation, mostly from gravel, sand or fine sediment; 5-30% (20-50% for low-gradient) of the bottom affected; slight deposition in pools.					Moderate deposition of new gravel, sand or fine sediment on old and new bars; 30-50% (50-80% for low-gradient) of the bottom affected; sediment deposits at obstructions, constrictions, and bends; moderate deposition of pools prevalent.					Heavy deposits of fine material, increased bar development; more than 50% (80% for low-gradient) of the bottom changing frequently; pools almost absent due to substantial sediment deposition.					
SCORE 14	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
5. Channel Flow Status	Water reaches base of both lower banks, and minimal amount of channel substrate is exposed.					Water fills >75% of the available channel; or <25% of channel substrate is exposed.					Water fills 25-75% of the available channel, and/or riffle substrates are mostly exposed.					Very little water in channel and mostly present as standing pools.					
SCORE 17	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
6. Channel Alteration	Channelization or dredging absent or minimal; stream with normal pattern.					Some channelization present, usually in areas of bridge abutments; evidence of past channelization, i.e., dredging, (greater than past 20 yr) may be present, but recent channelization is not present.					Channelization may be extensive; embankments or shoring structures present on both banks; and 40 to 80% of stream reach channelized and disrupted.					Banks shored with gabion or cement; over 80% of the stream reach channelized and disrupted. In stream habitat greatly altered or removed entirely.					
SCORE 15	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
7. Frequency of Riffles (or bends)	Occurrence of riffles relatively frequent; ratio of distance between riffles divided by width of the stream <7:1 (generally 5 to 7); variety of habitat is key. In streams where riffles are continuous, placement of boulders or other large, natural obstruction is important.					Occurrence of riffles infrequent; distance between riffles divided by the width of the stream is between 7 to 15.					Occasional riffle or bend; bottom contours provide some habitat; distance between riffles divided by the width of the stream is between 15 to 25.					Generally all flat water or shallow riffles; poor habitat; distance between riffles divided by the width of the stream is a ratio of >25.					
SCORE 15	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
8. Bank Stability (score each bank) Note: determine left or right side by facing downstream.	Banks stable; evidence of erosion or bank failure absent or minimal; little potential for future problems. <5% of bank affected.					Moderately stable; infrequent, small areas of erosion mostly healed over. 5-30% of bank in reach has areas of erosion.					Moderately unstable; 30-60% of bank in reach has areas of erosion; high erosion potential during floods.					Unstable; many eroded areas; "raw" areas frequent along straight sections and bends; obvious bank sloughing; 60-100% of bank has erosional scars.					
SCORE 4 (LB)	Left	10	9			8	7	6			5	4	3			2	1	0			
SCORE 3 (RB)	Right	10	9			8	7	6			5	4	3			2	1	0			
9. Bank Vegetative Protection (score each bank)	More than 90% of the streambank surfaces and immediate riparian zone covered by native vegetation, including trees, under story shrubs, or nonwoody macrophytes; vegetative disruption through grazing or mowing minimal or not evident; almost all plants allowed to grow naturally.					70-90% of the streambank surfaces covered by native vegetation, but one class of plants is not well-represented; disruption evident but not affecting full plant growth potential to any great extent; more than one-half of the potential plant stubble height remaining.					50-70% of the streambank surfaces covered by vegetation; disruption obvious; patches of bare soil or closely cropped vegetation common; less than one-half of the potential plant stubble height remaining.					Less than 50% of the streambank surfaces covered by vegetation; disruption of streambank vegetation is very high; vegetation has been removed to 5 centimeters or less in average stubble height.					
SCORE 5 (LB)	Left	10	9			8	7	6			5	4	3			2	1	0			
SCORE 3 (RB)	Right	10	9			8	7	6			5	4	3			2	1	0			
10. Riparian Vegetative Zone Width (score each bank riparian zone)	Width of riparian zone >18 meters; human activities (i.e., parking lots, roadbeds, clear-cuts, lawns, or crops) have not impacted zone.					Width of riparian zone 12-18 meters; human activities have impacted zone only minimally.					Width of riparian zone 6-12 meters; human activities have impacted zone a great deal.					Width of riparian zone <6 meters; little or no riparian vegetation due to human activities.					
SCORE 8 (LB)	Left	10	9			8	7	6			5	4	3			2	1	0			
SCORE 3 (RB)	Right	10	9			8	7	6			5	4	3			2	1	0			

## HABITAT SCORE

127

HABITAT SCORES	VALUE
OPTIMAL	160 – 200
SUB-OPTIMAL	110 – 159
MARGINAL	60 – 109
POOR	< 60

# FIBI017-R2

## Pleasant Run

06/22/2005

Common Name	Scientific Name	Abundance	Size Range (inches)
Blacknose Dace	<i>Rhinichthys atratulus</i>	532	-
Tessellated Darter	<i>Etheostoma olmstedii</i>	222	-
White Sucker	<i>Catostomus commersoni</i>	195	-
Creek Chub	<i>Semotilus atromaculatus</i>	155	-
Common Shiner	<i>Luxilus cornutus</i>	151	-
Longnose Dace	<i>Rhinichthys cataractae</i>	27	-
Banded Killifish	<i>Fundulus diaphanus</i>	12	-
Spottail Shiner	<i>Notropis hudsonius</i>	8	-
Redbreast Sunfish	<i>Lepomis auritus</i>	7	4.5 - 5.2
Green Sunfish	<i>Lepomis cyanellus</i>	3	3.0 - 3.9
American Eel	<i>Anguilla rostrata</i>	2	-
Redfin Pickerel	<i>Esox americanus americanus</i>	2	3.2 - 3.8
Margined Madtom	<i>Noturus insignis</i>	1	-

\* indicates stocked fish

**Species Identified at Pleasant Run (FIBI017)**  
(Not to Scale)



**White Sucker**



**Blacknose Dace**



**Common Shiner**



**Banded Killifish**



**Margined Madtom**



**Redbreast Sunfish**

**Species Identified at Pleasant Run (FIBI017)**  
(Not to Scale)



**American Eel**



**Spottail Shiner**



**Green Sunfish**



**Creek Chub**



**Longnose Dace**




**Tessellated Darter**

**Species Identified at Pleasant Run (FIBI017)**  
(Not to Scale)



**Redfin Pickerel**

# South Branch Rahway River - FIBI017a



0 1 2 4  
Miles




## SUMMARY OF RESULTS – FIBI017a



1. Stream Name:	South Branch Rahway River
2. Sampling Date:	9/28/05
3. Sampling Location:	Merill Park
4. Municipality:	Woodbridge Twp.
5. County:	Middlesex
6. Watershed Management Area:	7
7. Contributing Drainage Area (Sq. Mi.):	7.6
8. Electrofishing Gear:	2 Backpacks
9. FIBI Score and Rating:	Round 1 N/A; Round 2 Poor (24)
10. Habitat Score and Rating:	Round 1 N/A; Round 2 Marginal (77)
11. Fishable Species Present:	
12. Relevant AMNET <sup>1</sup> Station Data:	
Proximity of FIBI station to AMNET station:	140m upstream AN0201
AMNET Rating:	1999 – Moderate 2004-Moderate
13. Stream Chemistries:	
Dissolved Oxygen (mg/l)	7.71
Temperature °C.	16.26
PH	7.54
Conductivity (µmhos/cm)	605
14. Length of Stream Sampled:	150m
15. Water Clarity:	Slightly Turbid
16. Average Open Forest Canopy:	31.5%
17. Discharge:	1.3 cfs
18. Substrate:	62% Gravel/Sand, 10% Cobble, 1% Boulder, 5% Mud, 22% Silt
19. Habitat:	15% Riffle, 50% Run, 35% Pool
20. Snags:	Yes
21. Periphyton:	Slight
22. Submerged Aquatic Vegetation	No
23. Outfalls:	1
24. Number of Fish Species Identified:	11
25. Total Number of Fish Collected:	566
26. Number of Fish With Anomalies:	19
27. Other Observations:	

<sup>1</sup> AMNET is the acronym for the DEP's ambient benthic macroinvertebrate monitoring network – a series of 820 monitoring stations located throughout the state's waterways that collects data on the health of bottom dwelling stream fauna which in turn is used to assess general water quality.

**FIBI017A**  
**SOUTH BRANCH RAHWAY RIVER**  
**MERILL PARK**  
**WOODBIDGE TWP., MIDDLESEX COUNTY**

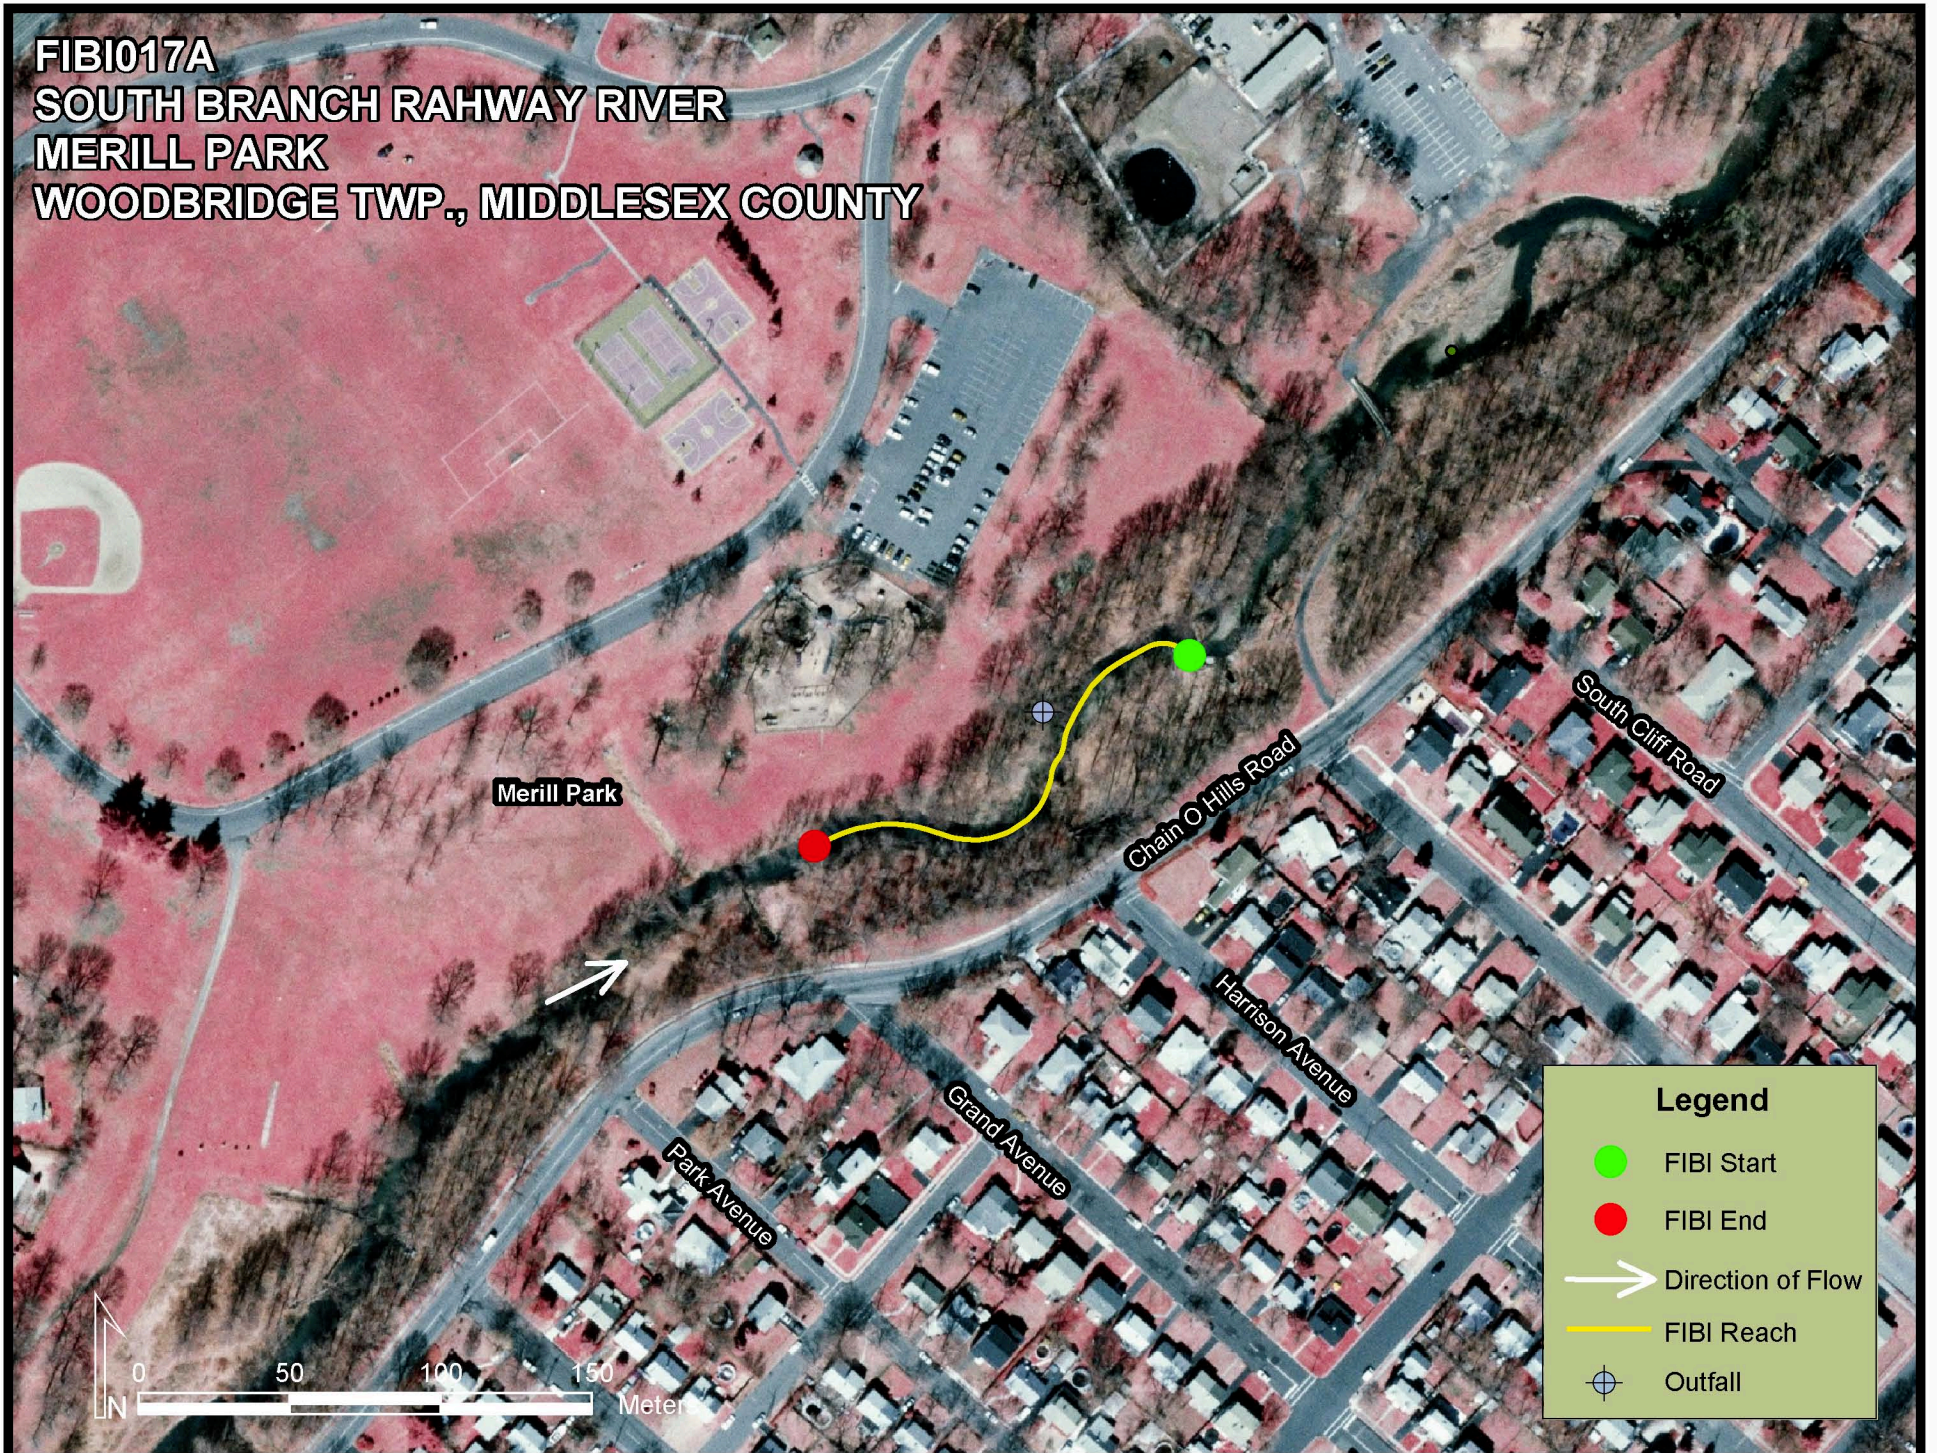

**FIBI017a-S.B. Rahway River @ Merrill Park**  
**Date Sampled - 9/28/2005**

Excellent      Good      Fair      **Poor**

	<b>Score</b>
# of Fish Species	3
# of Benthic Insectivorous Species (BI) (excluding White Suckers and Bullheads)	3
# of Trout and Centrarchid Species (excluding Green Sunfish and Bluegill)	3
# of Intolerant Species (IS)	1
Proportion of Tolerant Individuals	1
Proportion of Individuals as Generalists	1
Proportion of Individuals as Insectivorous Cyprinids	1
Proportion of Individuals as Trout      *whichever gives better score OR Proportion of Individuals as Piscivores (excluding American Eel)*	3
# of Individuals in Sample (excluding Tolerant Species)	5
Proportion of Individuals w/disease/anomalies (excluding blackspot)	3
Total	<b>24</b>

<b>Stream Rating</b>	
<b>45-50</b>	<b>Excellent</b>
<b>37-44</b>	<b>Good</b>
<b>29-36</b>	<b>Fair</b>
<b>10-28</b>	<b>Poor</b>

# HABITAT ASSESSMENT FOR *HIGH GRADIENT STREAMS* S. B. Rahway River (FIBI017a) – 9/28/05

	Condition Category																				
	Optimal					Suboptimal					Marginal					Poor					
1. Epifaunal Substrate /Available Cover	Greater than 70% of substrate favorable for epifaunal colonization and fish cover; mix of snags, submerged logs, undercut banks, cobble or other stable habitat and at stage to allow full colonization potential (i.e., logs/snags that are <u>not</u> new fall and <u>not</u> transient).					40-70% mix of stable habitat; well-suited for full colonization potential; adequate habitat for maintenance of populations; presence of additional substrate in the form of newfall, but not yet prepared for colonization (may rate at high end of scale).					20-40% mix of stable habitat; habitat availability less than desirable; substrate frequently disturbed or removed.					Less than 20% stable habitat; lack of habitat is obvious; substrate unstable or lacking.					
SCORE 6	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
2. Embeddedness	Gravel, cobble, and boulder particles are 0-25% surrounded by fine sediment. Layering of cobble provides diversity of niche space					Gravel, cobble, and boulder particles are 25-50% surrounded by fine sediment.					Gravel, cobble, and boulder particles are 50-75% surrounded by fine sediment.					Gravel, cobble, and boulder particles are more than 75% surrounded by fine sediment.					
SCORE 3	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
3. Velocity/Depth Regimes	All 4 velocity/depth regimes present (slow-deep, slow-shallow, fast-deep, fast-shallow). (slow is <0.3 m/s, deep is >0.5 m)					Only 3 of the 4 regimes present (if fast-shallow is missing, score lower than if missing other regimes).					Only 2 of the 4 habitat regimes present (if fast-shallow or slow-shallow are missing, score low).					Dominated by 1 velocity / depth regime (usually slow-deep).					
SCORE 13	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
4. Sediment Deposition	Little or no enlargement of islands or point bars and less than 5% (<20% for low-gradient streams) of the bottom affected by sediment deposition.					Some new increase in bar formation, mostly from gravel, sand or fine sediment; 5-30% (20-50% for low-gradient) of the bottom affected; slight deposition in pools.					Moderate deposition of new gravel, sand or fine sediment on old and new bars; 30-50% (50-80% for low-gradient) of the bottom affected; sediment deposits at obstructions, constrictions, and bends; moderate deposition of pools prevalent.					Heavy deposits of fine material, increased bar development; more than 50% (80% for low-gradient) of the bottom changing frequently; pools almost absent due to substantial sediment deposition.					
SCORE 6	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
5. Channel Flow Status	Water reaches base of both lower banks, and minimal amount of channel substrate is exposed.					Water fills >75% of the available channel; or <25% of channel substrate is exposed.					Water fills 25-75% of the available channel, and/or riffle substrates are mostly exposed.					Very little water in channel and mostly present as standing pools.					
SCORE 11	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
6. Channel Alteration	Channelization or dredging absent or minimal; stream with normal pattern.					Some channelization present, usually in areas of bridge abutments; evidence of past channelization, i.e., dredging, (greater than past 20 yr) may be present, but recent channelization is not present.					Channelization may be extensive; embankments or shoring structures present on both banks; and 40 to 80% of stream reach channelized and disrupted.					Banks shored with gabion or cement; over 80% of the stream reach channelized and disrupted. In stream habitat greatly altered or removed entirely.					
SCORE 18	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
7. Frequency of Riffles (or bends)	Occurrence of riffles relatively frequent; ratio of distance between riffles divided by width of the stream <7:1 (generally 5 to 7); variety of habitat is key. In streams where riffles are continuous, placement of boulders or other large, natural obstruction is important.					Occurrence of riffles infrequent; distance between riffles divided by the width of the stream is between 7 to 15.					Occasional riffle or bend; bottom contours provide some habitat; distance between riffles divided by the width of the stream is between 15 to 25.					Generally all flat water or shallow riffles; poor habitat; distance between riffles divided by the width of the stream is a ratio of >25.					
SCORE 6	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
8. Bank Stability (score each bank) Note: determine left or right side by facing downstream.	Banks stable; evidence of erosion or bank failure absent or minimal; little potential for future problems. <5% of bank affected.					Moderately stable; infrequent, small areas of erosion mostly healed over. 5-30% of bank in reach has areas of erosion.					Moderately unstable; 30-60% of bank in reach has areas of erosion; high erosion potential during floods.					Unstable; many eroded areas; "raw" areas frequent along straight sections and bends; obvious bank sloughing; 60-100% of bank has erosional scars.					
SCORE 3 (LB)	Left	10	9			8	7	6			5	4	3			2	1	0			
SCORE 2 (RB)	Right	10	9			8	7	6			5	4	3			2	1	0			
9. Bank Vegetative Protection (score each bank)	More than 90% of the streambank surfaces and immediate riparian zone covered by native vegetation, including trees, under story shrubs, or nonwoody macrophytes; vegetative disruption through grazing or mowing minimal or not evident; almost all plants allowed to grow naturally.					70-90% of the streambank surfaces covered by native vegetation, but one class of plants is not well-represented; disruption evident but not affecting full plant growth potential to any great extent; more than one-half of the potential plant stubble height remaining.					50-70% of the streambank surfaces covered by vegetation; disruption obvious; patches of bare soil or closely cropped vegetation common; less than one-half of the potential plant stubble height remaining.					Less than 50% of the streambank surfaces covered by vegetation; disruption of streambank vegetation is very high; vegetation has been removed to 5 centimeters or less in average stubble height.					
SCORE 2 (LB)	Left	10	9			8	7	6			5	4	3			2	1	0			
SCORE 3 (RB)	Right	10	9			8	7	6			5	4	3			2	1	0			
10. Riparian Vegetative Zone Width (score each bank riparian zone)	Width of riparian zone >18 meters; human activities (i.e., parking lots, roadbeds, clear-cuts, lawns, or crops) have not impacted zone.					Width of riparian zone 12-18 meters; human activities have impacted zone only minimally.					Width of riparian zone 6-12 meters; human activities have impacted zone a great deal.					Width of riparian zone <6 meters; little or no riparian vegetation due to human activities.					
SCORE 1 (LB)	Left	10	9			8	7	6			5	4	3			2	1	0			
SCORE 3 (RB)	Right	10	9			8	7	6			5	4	3			2	1	0			

## HABITAT SCORE

77

HABITAT SCORES	VALUE
OPTIMAL	160 – 200
SUB-OPTIMAL	110 – 159
MARGINAL	60 – 109
POOR	< 60

# FIBI017a-R2

## South Branch Rahway River

09/28/2005

Common Name	Scientific Name	Abundance	Size Range (inches)
Pumpkinseed	<i>Lepomis gibbosus</i>	209	2.4 - 4.7
White Sucker	<i>Catostomus commersoni</i>	119	-
Banded Killifish	<i>Fundulus diaphanus</i>	115	-
Tessellated Darter	<i>Etheostoma olmstedii</i>	36	-
Largemouth Bass	<i>Micropterus salmoides</i>	27	-
American Eel	<i>Anguilla rostrata</i>	17	-
Spottail Shiner	<i>Notropis hudsonius</i>	15	-
Golden Shiner	<i>Notemigonus crysoleucas</i>	11	-
Blacknose Dace	<i>Rhinichthys atratulus</i>	8	-
Mummichog	<i>Fundulus heteroclitus</i>	8	-
Brown Bullhead	<i>Ameiurus nebulosus</i>	1	9.8 - 9.8

\* indicates stocked fish

**Species Identified at S.B. Rahway (FIBI017a)**  
(Not to Scale)



**White Sucker**



**Blacknose Dace**



**Pumpkinseed Sunfish**



**Banded Killifish**



**Brown Bullhead**



**Golden Shiner**

**Species Identified at S.B. Rahway (FIBI017a)**  
(Not to Scale)



**American Eel**



**Spottail Shiner**



**Largemouth Bass**



**Tessellated Darter**



**Mummichog**